


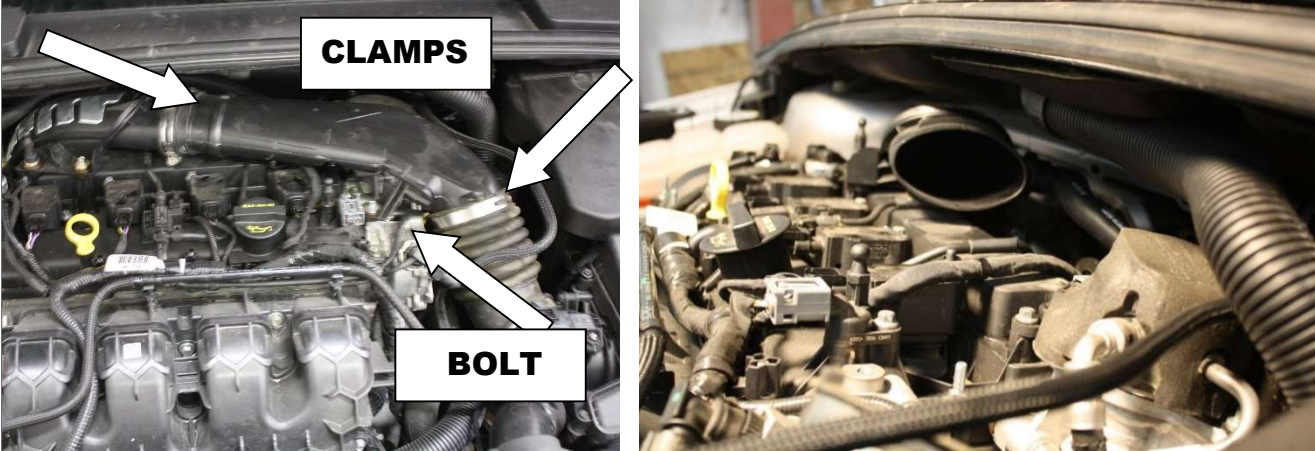

**757-842-6497**  
**WWW.JLOSC.COM**

**J&L 3.0 Oil Separator (2013-14 Focus ST REAR)  
#3021R  
Installation Instructions**

Please review complete instructions prior to installing.

Step#	
<b>1</b>	<b>Verify you have all of the following parts included in the kit:</b> (1) J&L Oil Separator, (1) Angled mounting bracket, (2) Fine thread machine screws, (1) Clamp, (1) 6mm bolt, (1) 6mm J Clip, (1) 20" ½" hoses and (1) 6" ½" hose
<b>2</b>	<b>Gather all of the following tools needed for the installation:</b> Phillips & regular screwdriver, light oil, and 8mm socket
<b>3</b>	Remove factory intake tube from here to here. 
<b>4</b>	Squeeze connections on the factory PCV hose and remove.
<b>5</b>	Use supplied screws to mount the bracket onto the Separator as shown on next page:



Remove small connection from factory PCV line and install small connector in supplied long 1/2" hose.  
The remaining factory hose will be connected to the short hose on the separator as shown in the picture below.

**TIP: Use oil on the fittings to aid in pushing the hose on. It's very tight and will not need any clamps.**



6

7

Install supplied "J" clip onto fire wall panel over cut out and bolt the unit to the car.



8

Reconnect the factory connectors, intake tube, engine cover and you're done.

To properly clean the filter in the Oil Separator, spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles.

Thank you for your business. If you have any questions, please e-mail [info@JLosc.com](mailto:info@JLosc.com) or call 757-842-6497. Our hours are Monday-Friday. 8:00am – 4:30pm Eastern Time.

**J&L Oil Separator co. Lifetime Satisfaction Guarantee. We want you to be a J&L customer for life!** Your new J&L product is warranted to be free from defects in materials and workmanship for the life of the *original retail purchaser*, subject to the limitations contained in our warranty found here. [www.JLosc.com/warranty](http://www.JLosc.com/warranty)

We guarantee workmanship and even a pathway to discounted upgrades for substantially improved items.

**Return Policy:** All returns will be subject to a 10%-25% restocking fee. Please visit [www.JLosc.com](http://www.JLosc.com) for complete return policy.

**Disclaimer:** J&L Oil Separator co. makes no warranties whatsoever, expressed, or implied, oral or written to any purchasers, except the warranty above. J&L Oil Separator co. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by J&L Oil Separator co. agree to hold harmless and indemnify J&L Oil Separator co. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to J&L Oil Separator co. for any claims arising out of use of its products.