



J&L 3.0 Oil Separator (2010-2019 Ford Flex 3.5 EcoBoost V6; 2010-2019 Lincoln MKT 3.5 EcoBoost V6 Passenger Side) #3035P

Installation Instructions


Check out our install Video on our website www.JLosc.com. Search: 3035P and click videos

Please review complete instructions prior to installing.

. N 2 S F	Verify you have all of the following parts included in the kit: (1) J&L Oil Separator, (1) J&L Mounting bracket, (2) Fine thread machine screws, (2) ½" hoses, (2) PCV connectors Gather all of the following tools needed for the installation: 13mm Socket and ratchet, Phillips screwdriver Remove engine cover by removing oil fill cap and pulling up on the cover. Remove factory PCV line by pulling tabs and pulling it off of the engine.
2 S F	Gather all of the following tools needed for the installation: 13mm Socket and ratchet, Phillips screwdriver Remove engine cover by removing oil fill cap and pulling up on the cover.
2 s F	screwdriver Remove engine cover by removing oil fill cap and pulling up on the cover.
F	Remove engine cover by removing oil fill cap and pulling up on the cover.
B F	Remove factory PCV line by pulling tabs and pulling it off of the engine.
P	Remove factory PCV line by pulling tabs and pulling it off of the engine.
	cocate 13mm bolt that holds A/C line to shock tower, remove bolt. Install J&L Bracket in the same control and reinstall bolt.

Install J&L can onto J&L bracket using the two supplied screws, the J&L Logo should be facing towards the front of the vehicle for proper hose routing.

The "C" side will go over the A/C line and under the small line to the valve cover, the "O" side fitting will route to the intake manifold.

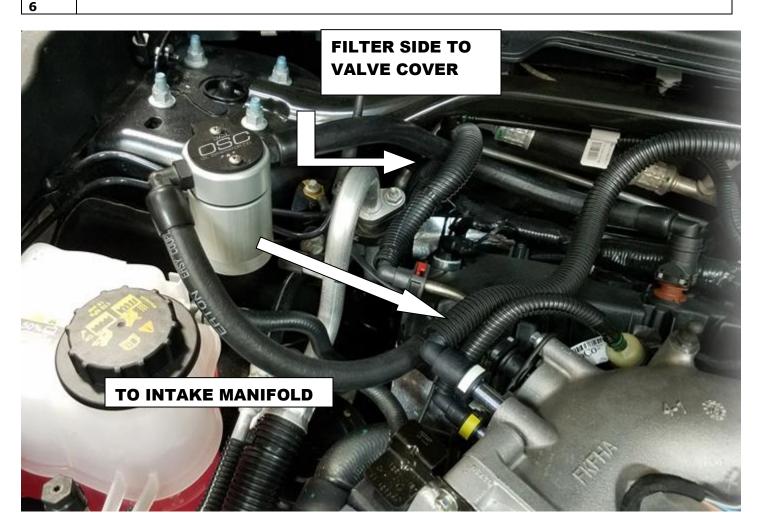

To properly clean the filter in the Oil Separator, spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles.

Thank you for your business. If you have any questions, please e-mail <u>info@JLosc.com</u> or call 757-842-6497. Our hours are Monday-Friday. 8:00am – 4:30pm Eastern Time.

J&L Oil Separator co. Lifetime Satisfaction Guarantee. We want you to be a J&L customer for life! Your new J&L product is warranted to be free from defects in materials and workmanship for the life of the *original retail purchaser*, subject to the limitations contained in our warranty found here. <u>www.JLosc.com/warranty</u>

We guarantee workmanship and even a pathway to discounted upgrades for substantially improved items. <u>Return Policy</u>: All returns will be subject to a 10%-25% restocking fee. Please visit <u>www.JLosc.com</u> for complete return policy. <u>Disclaimer</u>: J&L Oil Separator co. makes no warranties whatsoever, expressed, or implied, oral or written to any purchasers, except the warranty above. J&L Oil Separator co. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by J&L Oil Separator co. agree to hold harmless and indemnify J&L Oil Separator co. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to J&L Oil Separator co. for any claims arising out of use of its products.