




757-842-6497
WWW.JLOSC.COM


**J&L Oil Separator, Passenger Side
(2003-2004 Mercury Marauder)
#3046P**

Installation Instructions

Install video available at our website www.JLosc.com Search: 3046P and click videos.


Please review complete instructions prior to installing.

Step#	
1	Verify you have all of the following parts included in the kit: (1) J&L Oil Separator (1) J&L Mounting Bracket, (2) M4x.7x10 Thread Machine Screws, (1) M8x1.25 Bolt
2	Gather all of the following tools needed for the installation: 13mm socket and ratchet, Phillips screwdriver, light grease or oil.
	<p>Remove the factory PCV plastic hard line from the vehicle, you may need to twist the rubber connections with a pair of pliers to break loose. You may also want to consider replacing the rubber connections with new ones from your local Ford dealer.</p> 
3	
4	Mount J&L Bracket with supplied bolt to existing hole on front timing cover.

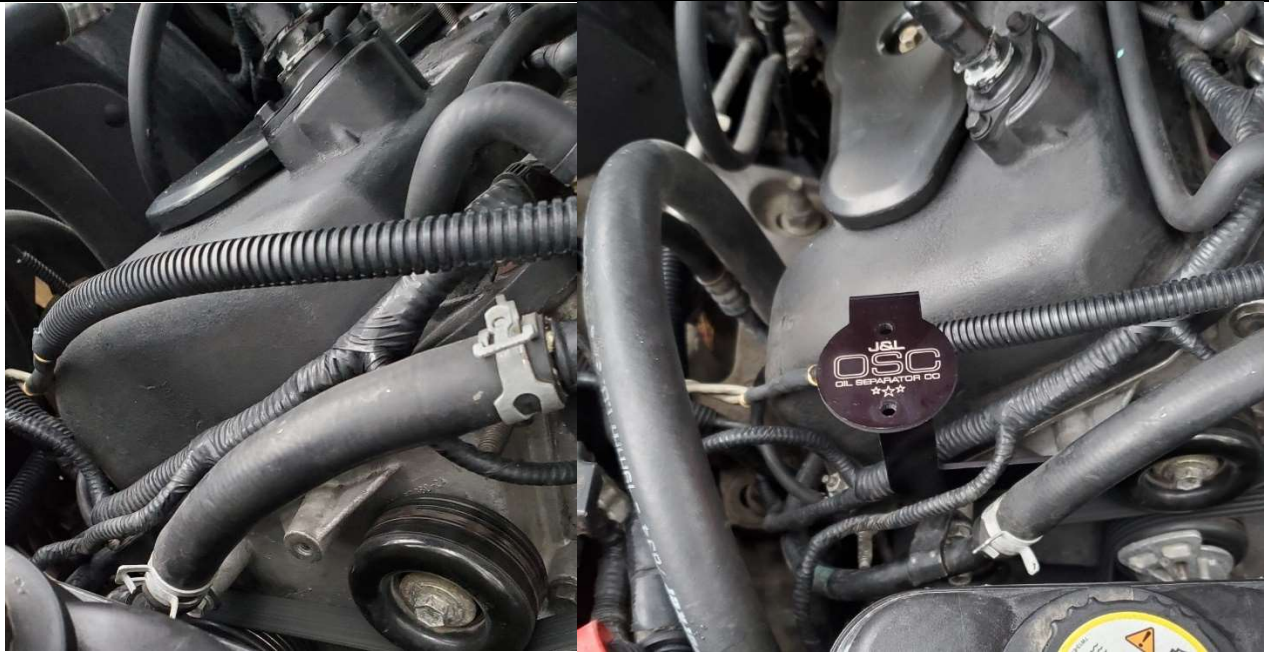

5

Mount J&L Oil Separator to the bracket with the supplied screws. Rotate PCV connection on valve cover to face oil separator. Lubricate connections with grease or light oil, this will help them slide fully into place. Hoses on the oil separator can twist on their respective fittings to change the angle of the hose for better layout.

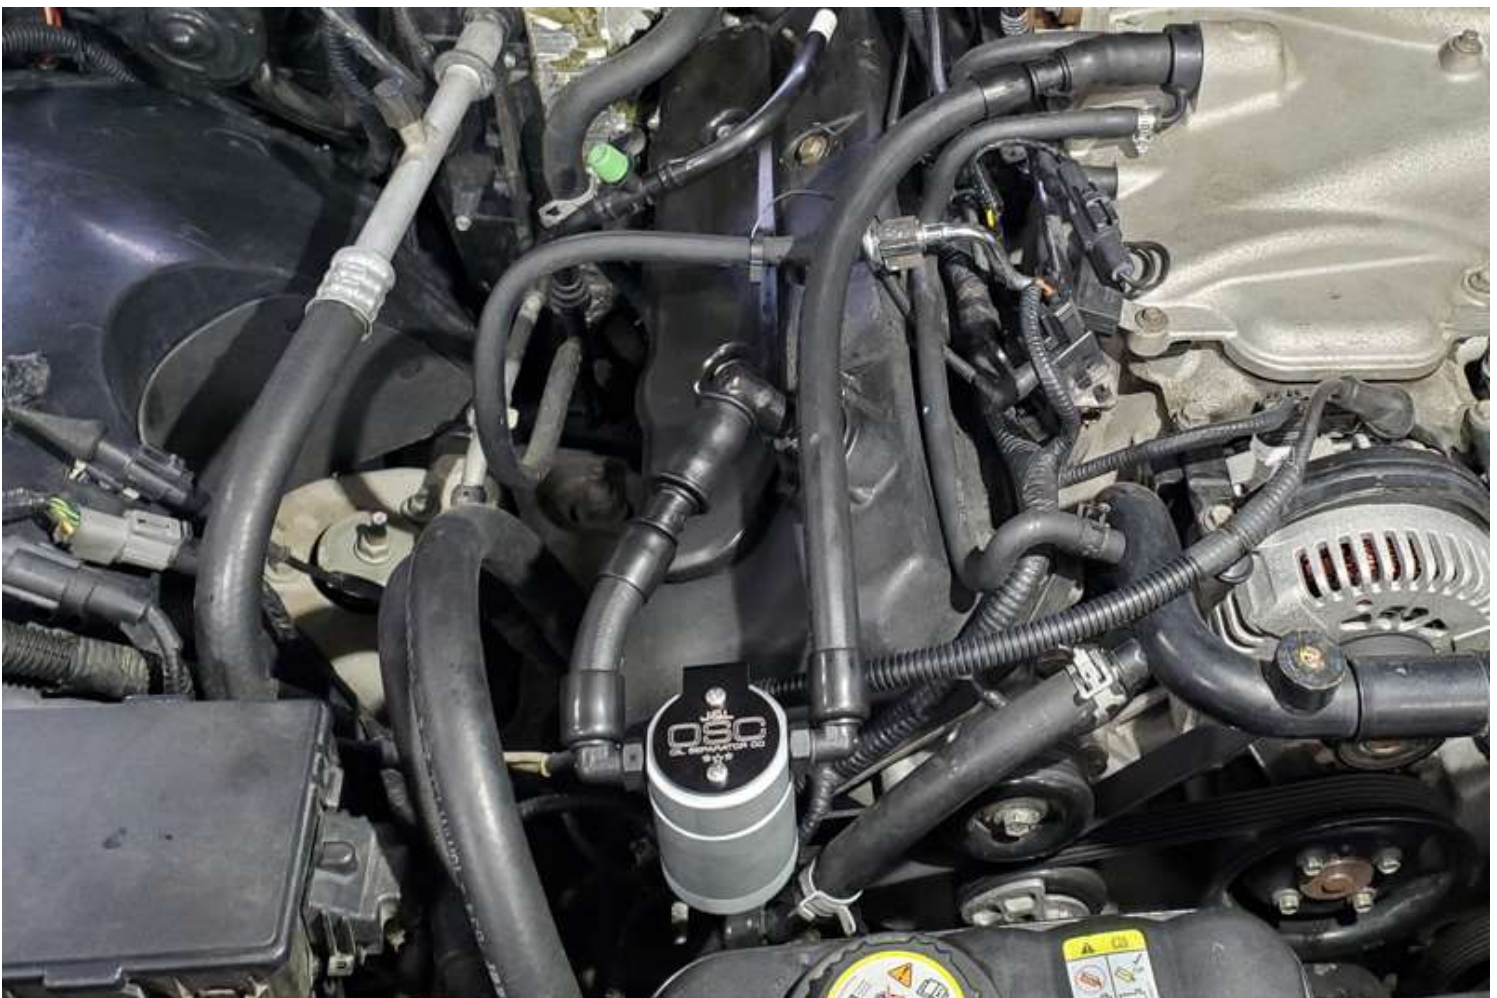

To properly clean the filter in the Oil Separator, spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles.

Thank you for your business. If you have any questions, please e-mail info@JLosc.com or call 757-842-6497. Our hours are Monday-Friday. 8:00am – 4:30pm Eastern Time.

J&L Oil Separator co. Lifetime Satisfaction Guarantee. We want you to be a J&L customer for life! Your new J&L product is warranted to be free from defects in materials and workmanship for the life of the *original retail purchaser*, subject to the limitations contained in our warranty found here. www.JLosc.com/warranty

We guarantee workmanship and even a pathway to discounted upgrades for substantially improved items.

Return Policy: All returns will be subject to a 10%-25% restocking fee. Please visit www.JLosc.com for complete return policy.

Disclaimer: J&L Oil Separator co. makes no warranties whatsoever, expressed, or implied, oral or written to any purchasers, except the warranty above. J&L Oil Separator co. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by J&L Oil Separator co. agree to hold harmless and indemnify J&L Oil Separator co. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to J&L Oil Separator co. for any claims arising out of use of its products.