



J&L 3.0 Oil Separator, Driver Side (2014-2022 Jeep Cherokee 2.4L; 2017-2022 Jeep Compass 2.4L; 2015-2021 Jeep Renegade 2.4L)

#3077D

Installation Instructions

Check out the install video of this product on our website <u>www.JLosc.com</u> Search: 3077D and click videos


Please review complete instructions prior to installing.

Step#	
	Verify you have all of the following parts included in the kit: (1) J&L Oil Separator with
1	hoses, (1) J&L Mounting bracket, (2) Fine thread machine screws
	Gather all of the following tools needed for the installation: Phillips screwdriver, Standard
2	Pliers, 10mm socket, ratchet, extension and light grease or oil
-	Remove the engine cover by unscrewing the 10mm bolt on the back passenger side of cover
	above the oil fill cap, lift the front of the cover to release it from the two grommets.
	above the on mill capy me the mone of the cover to release it mon the two grommets
ĺ	
	2.4 L multiair
3	
	Mount J&L Oil Separator to mounting bracket with supplied mounting screws, align logos so they
4	face the same direction
	Locate and remove stock PCV line from valve cover, you may need to use a pair of pliers to twist
	connect to break it free.
	A A AS A SECOND A BUS
5	
5	

Remove the 10mm bolt located in the photo below.



Mount J&L Oil Separator assembly to this location with the same bolt you removed.

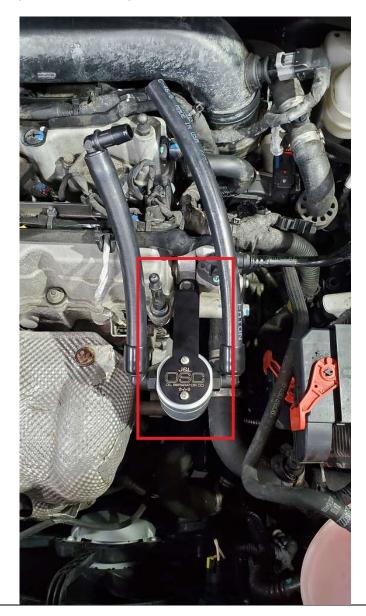

6


Use light grease or oil to lubricate the end of the hose without the fitting installed. Also lubricate PCV valve with the same oil/grease, this will help you side the hose onto the fitting. This will be tight so don't be afraid to use the lube!

Connect hose with fitting to the factory hose you disconnected earlier. The fitting in the end of the hose will rotate as needed for adjustment.



7

8	Reinstall engine cover.
9	Check the oil separator after 1000 miles of driving.

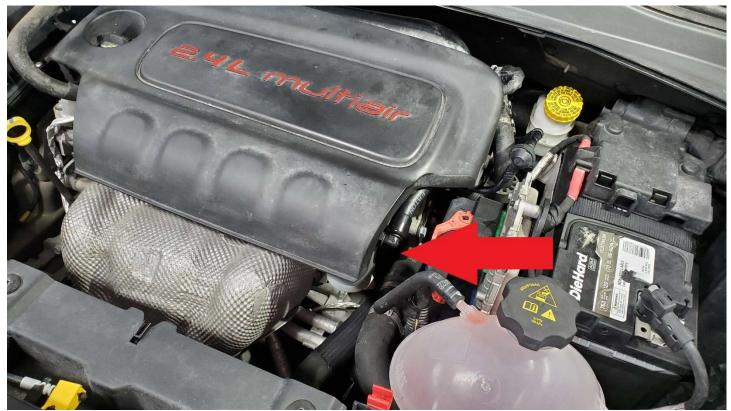

To properly clean the filter in the Oil Separator, spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles. Thank you for your business. If you have any questions, please e-mail <u>info@JLosc.com</u> or call 757-842-6497. Our hours are Monday-Friday. 8:00am – 4:30pm Eastern Time.

J&L Oil Separator co. Lifetime Satisfaction Guarantee. We want you to be a J&L customer for life! Your new J&L product is warranted to be free from defects in materials and workmanship for the life of the *original retail purchaser*, subject to the limitations contained in our warranty found here. www.JLosc.com/warranty

We guarantee workmanship and even a pathway to discounted upgrades for substantially improved items.

Return Policy: All returns will be subject to a 10%-25% restocking fee. Please visit www.JLosc.com for complete return policy.

Disclaimer: J&L Oil Separator co. makes no warranties whatsoever, expressed, or implied, oral or written to any purchasers, except the warranty above. J&L Oil Separator co. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by J&L Oil Separator co. agree to hold harmless and indemnify J&L Oil Separator co. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to J&L Oil Separator co. for any claims arising out of use of its products.