




757-842-6497
WWW.JLOSC.COM

**J&L Oil Separator, Driver Side
(2021.5-2024 Ford Bronco 2.3L EcoBoost)
#3075P**

Installation Instructions


**Install video available at our website www.JLosc.com Search: 3075P and click videos.
Please review complete instructions prior to installing.**

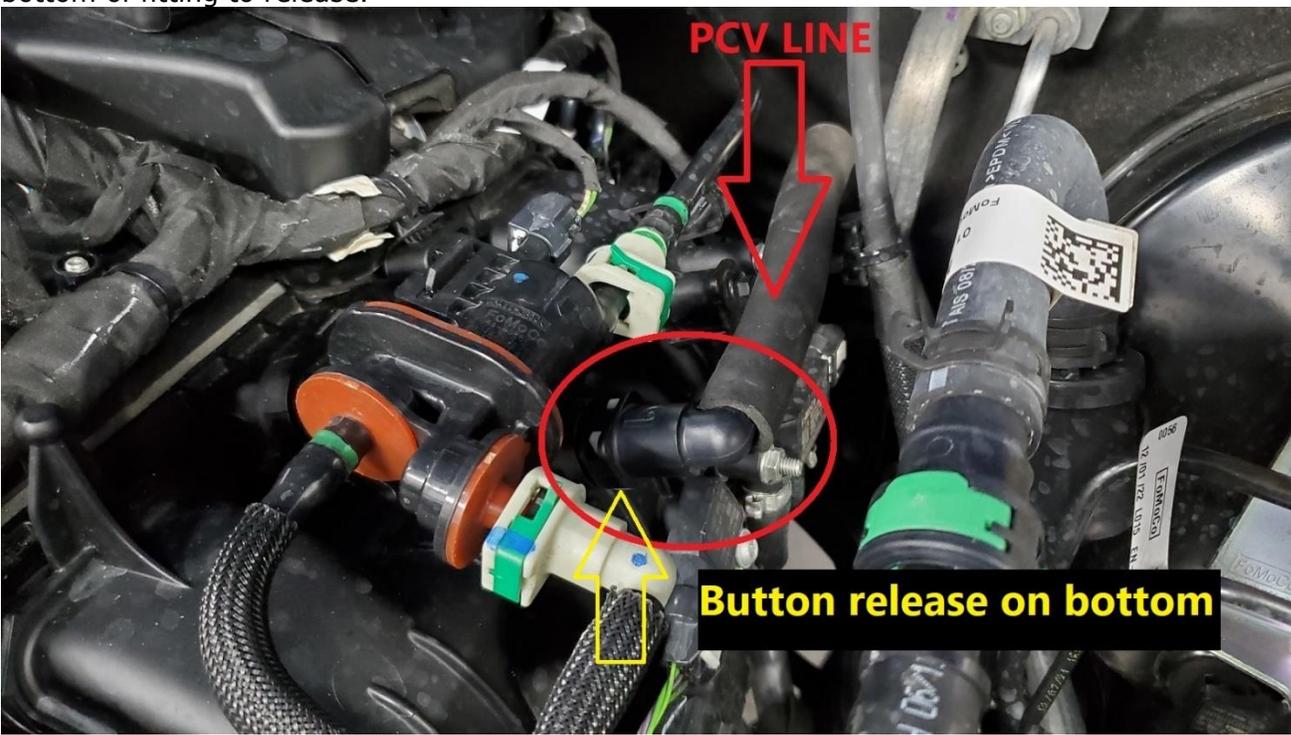Step#	
1	Verify you have all of the following parts included in the kit: (1) J&L Oil Separator (1) J&L Mounting Bracket, (2) Fine Thread Machine Screws, (1) M8 Mounting bolt
2	Gather all of the following tools needed for the installation: 13mm socket and ratchet and Phillips screwdriver.
3	<p>Locate and remove Factory PCV line from intake manifold, push the larger white button on bottom of fitting to release.</p> 
4	<p>Twist factory fitting in the end of the hose to point towards driver side fender.</p> 

Locate threaded hole on the front of the brake line block and use supplied bolt to mount J&L bracket.



Mount J&L Oil separator to J&L bracket with supplied screws, align logos for proper orientation. You will need to feed the hose with the male fitting under the brake master cylinder towards the engine.

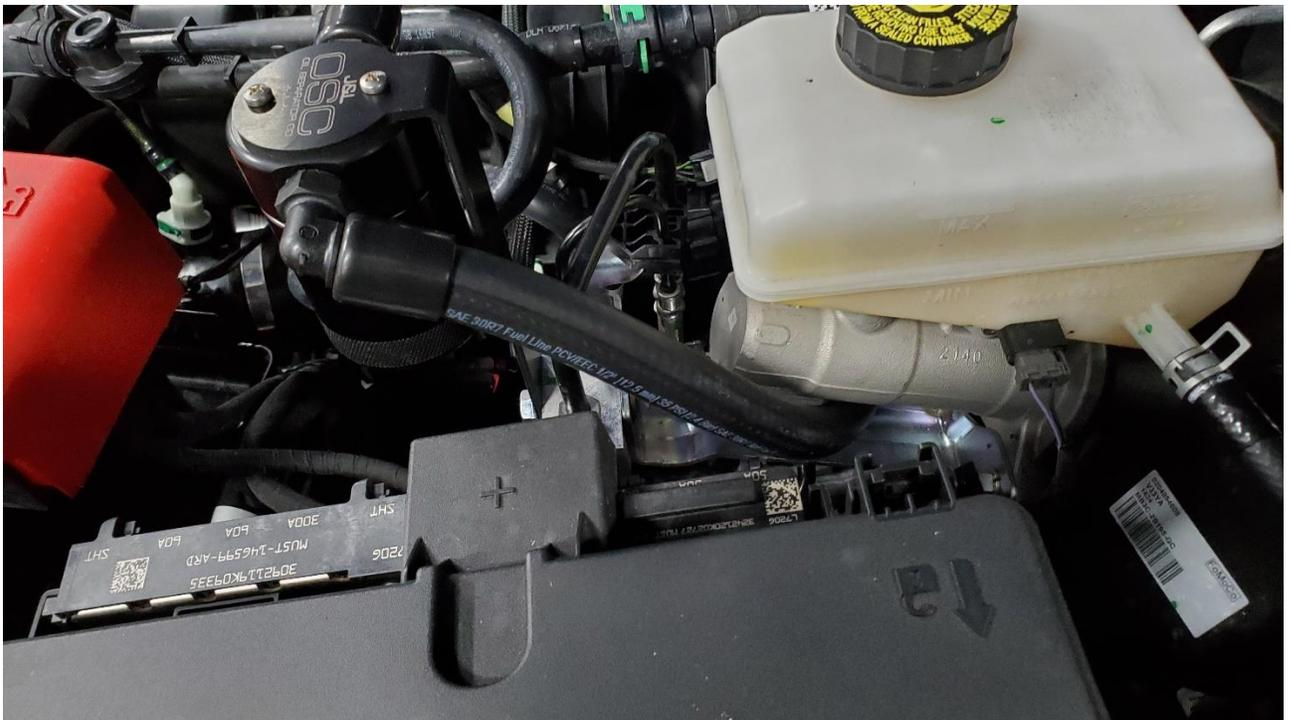

Connect hoses to the valve cover and to the factory PCV line.

Note: The fitting in the J&L Hose has a push button release, along with a locking tab. See below for how this fitting operates. The locking tab can only be engaged once installed onto connection.




To remove:



TIP: The quick connections are all adjustable in the end of the hoses, if the fitting isn't at an optimum angle, twist the fitting until it is. The hoses can also twist on the J&L Oil separator connections for adjustment, use the natural bend of the hoses to your advantage.

6 This oil separator is compatible with our reservoir extension (Part #'s EXT-B & EXT-C).

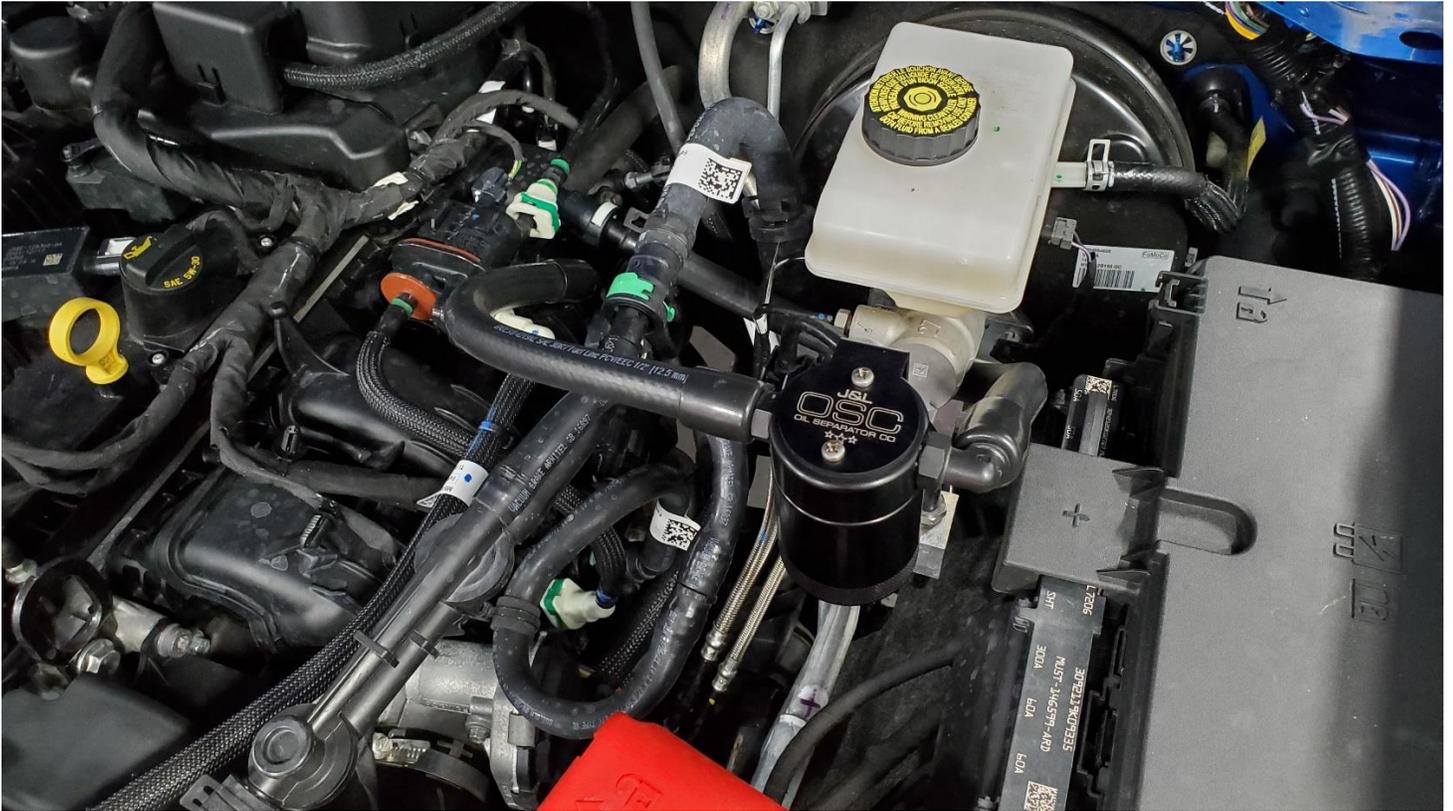

To properly clean the filter in the Oil Separator, spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles.

Thank you for your business. If you have any questions, please e-mail info@JLosc.com or call 757-842-6497. Our hours are Monday-Friday. 8:00am – 4:30pm Eastern Time.

J&L Oil Separator co. Lifetime Satisfaction Guarantee. We want you to be a J&L customer for life! Your new J&L product is warranted to be free from defects in materials and workmanship for the life of the *original retail purchaser*, subject to the limitations contained in our warranty found here. www.JLosc.com/warranty

We guarantee workmanship and even a pathway to discounted upgrades for substantially improved items.

Return Policy: All returns will be subject to a 10%-25% restocking fee. Please visit www.JLosc.com for complete return policy.

Disclaimer: J&L Oil Separator co. makes no warranties whatsoever, expressed, or implied, oral or written to any purchasers, except the warranty above. J&L Oil Separator co. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by J&L Oil Separator co. agree to hold harmless and indemnify J&L Oil Separator co. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to J&L Oil Separator co. for any claims arising out of use of its products.